
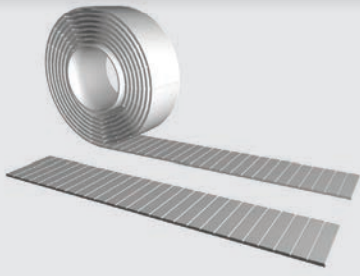


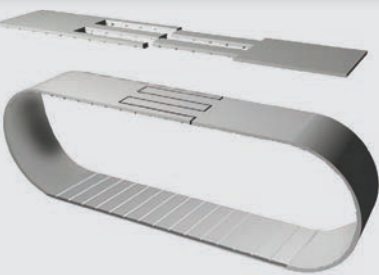


Open-Ended "M"	Specifications			
	Widths (mm) In between widths available	30	50	100
	Lengths	Any lengths available - Stock rolls 50 meters		
	Available Options	Nylon coating grooved side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
	Tension Member Options	Steel standard		

Spliced and Welded "V"	Specifications			
	Widths (mm) In between widths available	30	50	100
	Min. Joined Length (mm) Increasing in 10mm increments	880		
	Available Options	Nylon coating grooved side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
	Tension Member Options	Steel standard		

Specifications

Timing Belt	Pitch (mm)	Code	Ultimate Tensile Strength (N/10mm belt width)	Maximum Allowable Tensile Strength (N/10mm belt width)	Specific Belt Stiffness Steel Reinforced (Per unit width/length)	Specific Belt Mass (per 10mm belt width, steel reinforced)	Min. # of Teeth on Pulley / Flat Idler Min. Ø no back bending	Min. # of Teeth on Pulley / Flat Idler Min. Ø with back bending
Flat Belt Series	F3.0	M	12320	3080	7.70×10^6 N	0.068 kg/m	 Ø120 / 120mm	 Ø120 / 150mm
		V	-	1540	-			

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]
 50 F3.0 / 3000 M