


Open-Ended "M"

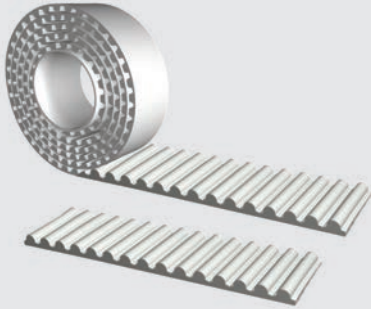

Specifications

Widths (mm) In between widths available	20	25	30	40	50	55	85	100	115	120
Lengths	Any lengths available - Stock rolls 30 meters									
Available Options	Nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)									
Tension Member Options	High Power (HP) Steel High Flex (HF) Steel									

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION] [CORD]

100 HTD 14M / 29988 M HP