



# T20 DL

# BFX Double Sided-SERIES

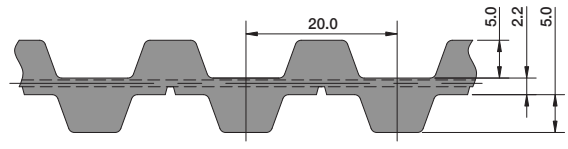

## Truly Endless "BFX"

## Specifications

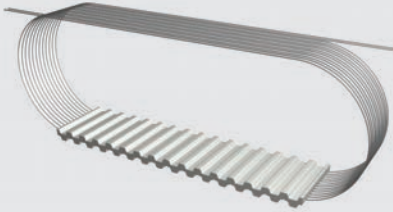

<b>Widths (inches)</b> <small>In between widths available</small>	25	32	50	75	100
<b>Lengths</b>	See Standard Lengths Below Additional lengths available up to 22,000mm. In between lengths available starting at a minimum length of 1,100mm, belts wider than 150mm available up to 15,000mm from a min length of 1,500mm.				
<b>Available Options</b>	Nylon coating tooth side (PAZ) one side only				
<b>Tension Member Options</b>	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel				

## Specifications

Timing Belt	Pitch (mm)	Code	Ultimate Tensile Strength (N/10mm belt width)	Maximum Allowable Tensile Strength (N/10mm belt width)	Specific Belt Stiffness Steel Reinforced (Per unit width/length)	Specific Belt Mass (per 10mm belt width, steel reinforced)	Min. # of Teeth on Pulley / Flat Idler Min. Ø no back bending	Min. # of Teeth on Pulley / Flat Idler Min. Ø with back bending
Double Sided Series	T20 DL	BFX	6400	1600	4.00 x 10 <sup>6</sup> N	0.100 kg/m	25 / 150mm	25 / 180mm

## Standard Lengths

Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth
AT20 DL / 1500 BFX	75	AT20 DL / 2800 BFX	140	AT20 DL / 5300 BFX	265
AT20 DL / 1600 BFX	80	AT20 DL / 3000 BFX	150	AT20 DL / 5600 BFX	280
AT20 DL / 1700 BFX	85	AT20 DL / 3160 BFX	158	AT20 DL / 6000 BFX	300
AT20 DL / 1800 BFX	90	AT20 DL / 3360 BFX	168	AT20 DL / 6300 BFX	315
AT20 DL / 1900 BFX	95	AT20 DL / 3560 BFX	178	AT20 DL / 6700 BFX	335
AT20 DL / 2000 BFX	100	AT20 DL / 3620 BFX	181	AT20 DL / 7100 BFX	355
AT20 DL / 2120 BFX	106	AT20 DL / 3760 BFX	188	AT20 DL / 7500 BFX	375
AT20 DL / 2240 BFX	112	AT20 DL / 4000 BFX	200	AT20 DL / 8000 BFX	400
AT20 DL / 2360 BFX	118	AT20 DL / 4260 BFX	213	AT20 DL / 8500 BFX	425
AT20 DL / 2500 BFX	125	AT20 DL / 4500 BFX	225	AT20 DL / 9000 BFX	450
AT20 DL / 2600 BFX	130	AT20 DL / 4760 BFX	238		
AT20 DL / 2660 BFX	133	AT20 DL / 5000 BFX	250		

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]  
75 T20 DL / 4500 BFX