


AT10/ATP10

SFX Redflex GEN III-SERIES



AT10 Redflex GEN III Truly Endless "SFX"

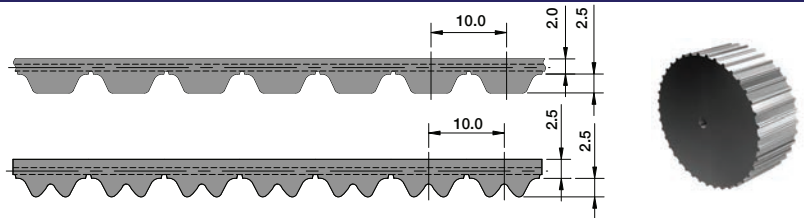

Specifications

Widths (mm) In between widths available	16	25	32	50	75	100	150
Tension Members	Steel standard						

Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth
AT10 / 500 SFX	50	AT10 / 880 SFX	88	AT10 / 1200 SFX	120	AT10 / 1600 SFX	160
AT10 / 560 SFX	56	AT10 / 890 SFX	89	AT10 / 1210 SFX	121	AT10 / 1700 SFX	170
AT10 / 580 SFX	58	AT10 / 920 SFX	92	AT10 / 1250 SFX	125	AT10 / 1720 SFX	172
AT10 / 600 SFX	60	AT10 / 960 SFX	96	AT10 / 1280 SFX	128	AT10 / 1800 SFX	180
AT10 / 610 SFX	61	AT10 / 980 SFX	98	AT10 / 1300 SFX	130	AT10 / 1860 SFX	186
AT10 / 660 SFX	66	AT10 / 1000 SFX	100	AT10 / 1320 SFX	132	AT10 / 1940 SFX	194
AT10 / 700 SFX	70	AT10 / 1010 SFX	101	AT10 / 1350 SFX	135		
AT10 / 730 SFX	73	AT10 / 1050 SFX	105	AT10 / 1360 SFX	136		
AT10 / 780 SFX	78	AT10 / 1080 SFX	108	AT10 / 1400 SFX	140		
AT10 / 800 SFX	80	AT10 / 1100 SFX	110	AT10 / 1480 SFX	148		
AT10 / 840 SFX	84	AT10 / 1150 SFX	115	AT10 / 1500 SFX	150		

ATP10 Redflex GEN III Truly Endless "SFX"



Specifications

Widths (mm) In between widths available	16	25	32	50
Tension Members	Steel standard			

Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth
ATP10 / 630 SFX	63	ATP10 / 890 SFX	89	ATP10 / 1280 SFX	128
ATP10 / 660 SFX	66	ATP10 / 920 SFX	92	ATP10 / 1400 SFX	140
ATP10 / 700 SFX	70	ATP10 / 1010 SFX	101	ATP10 / 1650 SFX	165
ATP10 / 780 SFX	78	ATP10 / 1080 SFX	108	ATP10 / 1800 SFX	180
ATP10 / 840 SFX	84	ATP10 / 1150 SFX	115		

Specifications

Timing Belt	Pitch (mm)	Code	Ultimate Tensile Strength (N/10mm belt width)	Maximum Allowable Tensile Strength (N/10mm belt width)	Specific Belt Stiffness Steel Reinforced (Per unit width/length)	Specific Belt Mass (per 10mm belt width, steel reinforced)	Min. # of Teeth on Pulley / Flat Idler Min. Ø no back bending	Min. # of Teeth on Pulley / Flat Idler Min. Ø with back bending
Redflex GEN III Series	AT10	BFX	8800	2200	5.50 x 10 ⁵ N	0.073 kg/m	15 / 50mm	25 / 120mm
Redflex GEN III Series	ATP10	BFX	8800	2200	5.50 x 10 ⁵ N	0.068 kg/m	20 / 60mm	25 / 120mm