


# AT15 Pitch Open-Ended "M"

## Open-Ended "M"

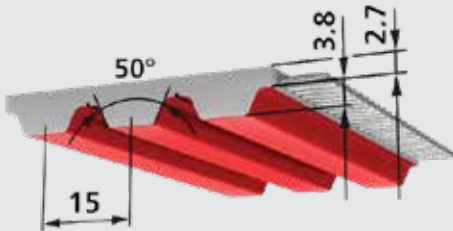

## Specifications

Widths (mm)	25	32	50	75	100	150
Lengths	Any lengths available - Stock Rolls 50 Meters					
Standard Material	TPUST1					
move Tension Member	Steel					
Belt Color	White / Red					

### AT15move Belt "M" Specifications

Construction	Tension-member	Dimension	Belt Width (mm)			
			50	75	100	150
Open-Ended "M"	AT15move Tension Member	$F_{zu}[N]$	18,200	27,300	36,400	54,600
	Specific Stiffness	$C_{spec}[N]$	$4.55 \cdot 10^6$	$6.82 \cdot 10^6$	$9.10 \cdot 10^6$	$13.65 \cdot 10^6$
	Belt Mass	[kg/m/cm]	0.070 kg per meter of belt length per cm of belt width			

### move-series® Flexibility

(minimum tooth count/minimum diameter)

Drive w/o back bending	Tension Member Construction	AT15move Tension Member
	$Z_{min}$	M/BFX
	$d_{min}(mm)$	20
		100
Drive with back bending	Tension Member Construction	AT15move Tension Member
	$Z_{min}$	M/BFX
	$d_{min}(mm)$	25
		120

