


# ATK20K13

# M / V Self-Tracking-SERIES

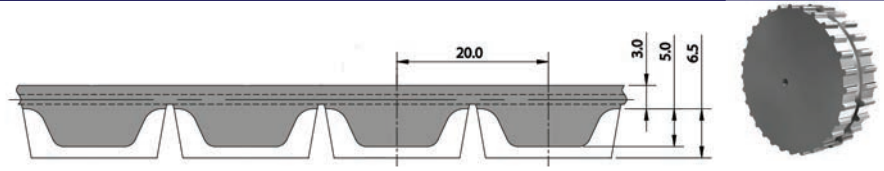

## Open-Ended "M"

### Specifications

<b>Widths (mm)</b> In between widths available	50	75	100
<b>Lengths</b>	Any lengths available - Stock rolls 50 meters		
<b>Available Options</b>	Nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
<b>Tension Member Options</b>	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®		




## Spliced and Welded "V"

### Specifications

<b>Widths (mm)</b> In between widths available	50	75	100
<b>Min. Joined Length (mm)</b> Increasing in one tooth increments	1,000		
<b>Available Options</b>	Nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
<b>Tension Member Options</b>	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®		

### Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
ATK20K13	20	25	120	120



Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]  
75 ATK20K13 / 4000 M