



# ATK5K6

# BFX Self-Tracking-SERIES

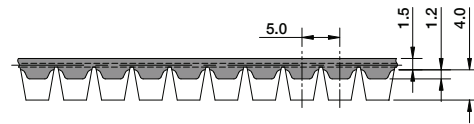

## Truly Endless "BFX"

## Specifications

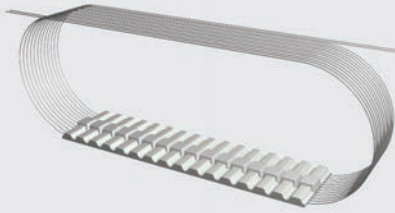


<b>Widths (inches)</b> In between widths available	25	32	50	75	100
<b>Lengths</b>	See Standard Lengths Below Additional lengths available up to 15,000mm. In between lengths available starting at a minimum length of 1,075mm.				
<b>Available Options</b>	Nylon coating tooth side (PAZ)				
<b>Tension Member Options</b>	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®				

### Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
ATK5K6	20	20	60	80

### Standard Material



### Standard Lengths

Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth
ATK5K6 / 1075 BFX	215	ATK5K6 / 2240 BFX	448	ATK5K6 / 4500 BFX	900
ATK5K6 / 1100 BFX	220	ATK5K6 / 2360 BFX	472	ATK5K6 / 4750 BFX	950
ATK5K6 / 1215 BFX	243	ATK5K6 / 2500 BFX	500	ATK5K6 / 5000 BFX	1000
ATK5K6 / 1380 BFX	276	ATK5K6 / 2650 BFX	530	ATK5K6 / 5300 BFX	1060
ATK5K6 / 1400 BFX	280	ATK5K6 / 2800 BFX	560	ATK5K6 / 5600 BFX	1120
ATK5K6 / 1500 BFX	300	ATK5K6 / 3000 BFX	600	ATK5K6 / 6000 BFX	1200
ATK5K6 / 1600 BFX	320	ATK5K6 / 3150 BFX	630	ATK5K6 / 6300 BFX	1260
ATK5K6 / 1700 BFX	340	ATK5K6 / 3350 BFX	670	ATK5K6 / 6700 BFX	1340
ATK5K6 / 1800 BFX	360	ATK5K6 / 3550 BFX	710	ATK5K6 / 7100 BFX	1420
ATK5K6 / 1900 BFX	380	ATK5K6 / 3750 BFX	750	ATK5K6 / 7500 BFX	1500
ATK5K6 / 2000 BFX	400	ATK5K6 / 4000 BFX	800		
ATK5K6 / 2120 BFX	424	ATK5K6 / 4250 BFX	850		

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]  
50 ATK5K6 / 5300 BFX