



Open-Ended "M"

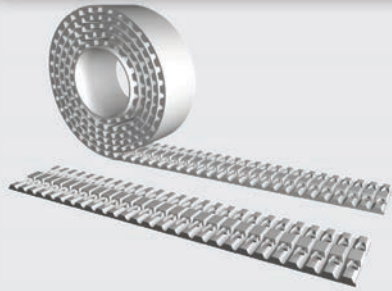

Specifications

Widths (mm) In between widths available	50	75	100
Lengths	Any lengths available - Stock rolls 50 meters		
Available Options	White nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel		
Note	Location of self-tracking guide always 25mm from belt edge		

Spliced and Welded "V"

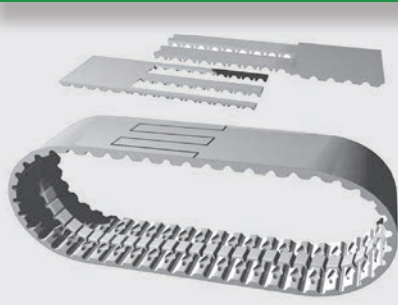


Specifications

Widths (mm) In between widths available	50	75	100
Min. Joined Length (mm) One tooth increments	508		
Available Options	White nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel		
Note	Location of self-tracking guide always 25mm from belt edge		

Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
ATN12.7K6	20	-	80	-

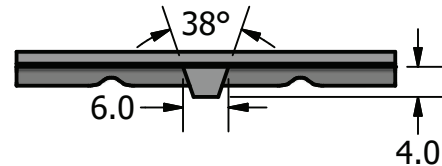

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

50 ATN12.7K6 / 2540 V