



TK10K6

BFX Self-Tracking-SERIES

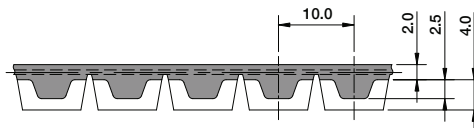

Truly Endless "BFX"

Specifications

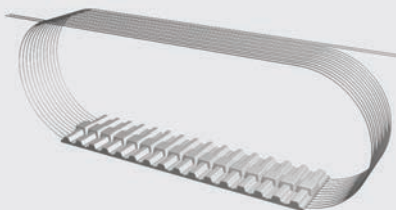


Widths (inches) <small>In between widths available</small>	25	50	100
Lengths	See Standard Lengths Below Additional lengths available up to 22,000mm. In between lengths available starting at a minimum of 720mm, except 1,080mm minimum for widths greater than 50mm.		
Available Options	Nylon coating tooth side (PAZ)		
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®		

Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
TK5K6	25	25	60	80

Standard Material



Standard Lengths

Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth
TK10K6 / 1080 BFX	108	TK10K6 / 1750 BFX	175	TK10K6 / 4000 BFX	400
TK10K6 / 1150 BFX	115	TK10K6 / 1780 BFX	178	TK10K6 / 4250 BFX	425
TK10K6 / 1210 BFX	121	TK10K6 / 1880 BFX	188	TK10K6 / 4500 BFX	450
TK10K6 / 1240 BFX	124	TK10K6 / 1960 BFX	196	TK10K6 / 4750 BFX	475
TK10K6 / 1250 BFX	125	TK10K6 / 2250 BFX	225	TK10K6 / 5000 BFX	500
TK10K6 / 1320 BFX	132	TK10K6 / 2360 BFX	236	TK10K6 / 5300 BFX	530
TK10K6 / 1350 BFX	135	TK10K6 / 2500 BFX	250	TK10K6 / 5600 BFX	560
TK10K6 / 1390 BFX	139	TK10K6 / 2650 BFX	265	TK10K6 / 6000 BFX	600
TK10K6 / 1400 BFX	140	TK10K6 / 2800 BFX	280	TK10K6 / 6300 BFX	630
TK10K6 / 1420 BFX	142	TK10K6 / 3000 BFX	300	TK10K6 / 6700 BFX	670
TK10K6 / 1460 BFX	146	TK10K6 / 3100 BFX	310	TK10K6 / 7100 BFX	710
TK10K6 / 1500 BFX	150	TK10K6 / 3150 BFX	315	TK10K6 / 7500 BFX	750
TK10K6 / 1560 BFX	156	TK10K6 / 3350 BFX	335	TK10K6 / 8000 BFX	800
TK10K6 / 1610 BFX	161	TK10K6 / 3750 BFX	375	TK10K6 / 9000 BFX	900

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

50 TK10K6 / 5300 BFX