


# TK10K6

# M / V Self-Tracking-SERIES

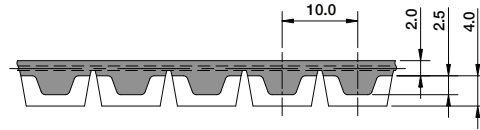

## Open-Ended "M"


### Specifications



<b>Widths (mm)</b> <small>In between widths available</small>	25	50
<b>Lengths</b>	Any lengths available - Stock rolls 50 meters	
<b>Available Options</b>	Nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)	
<b>Tension Member Options</b>	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®	

## Spliced and Welded "V"

### Specifications

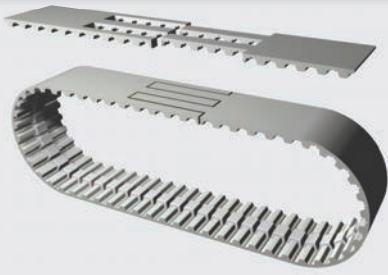


<b>Widths (mm)</b> <small>In between widths available</small>	25	50
<b>Min. Joined Length (mm)</b> <small>Increasing in one tooth increments</small>	1,000	
<b>Available Options</b>	Nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)	
<b>Tension Member Options</b>	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®	

### Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
TK5K6	25	25	60	80

### Standard Material

TPUST1<sup>1)</sup>



Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

50 TK10K6 / 5300 BFX