


Truly Endless "BFX"

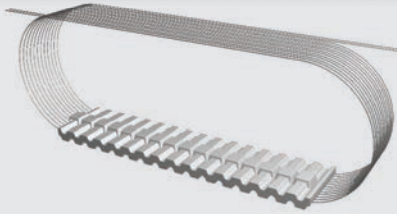

Widths (inches) <small>In between widths available</small>	25	50	100
Lengths	See Standard Lengths Below Additional lengths available up to 22,000mm. In between lengths available starting at a minimum length of 1,500mm.		
Available Options	Nylon coating tooth side (PAZ) one side only		
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®		

Specifications

Timing Belt	Pitch (mm)	Code	Ultimate Tensile Strength (N/10mm belt width)	Maximum Allowable Tensile Strength (N/10mm belt width)	Specific Belt Stiffness Steel Reinforced (Per unit width/length)	Specific Belt Mass (per 10mm belt width, steel reinforced)	Min. # of Teeth on Pulley / Flat Idler Min. Ø no back bending	Min. # of Teeth on Pulley / Flat Idler Min. Ø with back bending
Double Sided Series	ATK10K6 DL	BFX	6400	1600	4.00 x 10 ⁵ N	0.077 kg/m	25 / 80mm	25 / 120mm

Standard Lengths

Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth
ATK10K6 DL / 1500 BFX	150	ATK10K6 DL / 2650 BFX	265	ATK10K6 DL / 4750 BFX	475
ATK10K6 DL / 1600 BFX	160	ATK10K6 DL / 2800 BFX	280	ATK10K6 DL / 5000 BFX	500
ATK10K6 DL / 1700 BFX	170	ATK10K6 DL / 3000 BFX	300	ATK10K6 DL / 5300 BFX	530
ATK10K6 DL / 1800 BFX	180	ATK10K6 DL / 3150 BFX	315	ATK10K6 DL / 5600 BFX	560
ATK10K6 DL / 1900 BFX	190	ATK10K6 DL / 3350 BFX	335	ATK10K6 DL / 6000 BFX	600
ATK10K6 DL / 2000 BFX	200	ATK10K6 DL / 3550 BFX	355	ATK10K6 DL / 6300 BFX	630
ATK10K6 DL / 2120 BFX	212	ATK10K6 DL / 3750 BFX	375	ATK10K6 DL / 6700 BFX	670
ATK10K6 DL / 2240 BFX	224	ATK10K6 DL / 4000 BFX	400	ATK10K6 DL / 7100 BFX	710
ATK10K6 DL / 2360 BFX	236	ATK10K6 DL / 4250 BFX	425	ATK10K6 DL / 7500 BFX	750
ATK10K6 DL / 2500 BFX	250	ATK10K6 DL / 4500 BFX	450	ATK10K6 DL / 8000 BFX	800

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

50 ATK10K6 DL / 3750 BFX