


AT15 Pitch Open-Ended "M"

Open-Ended "M"

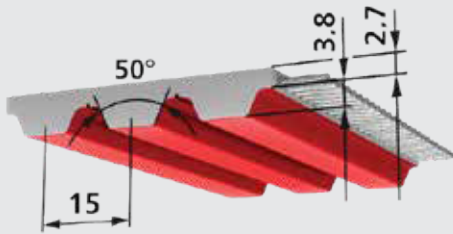

Specifications

Widths (mm)	25	32	50	75	100	150
Lengths	Any lengths available - Stock Rolls 50 Meters					
Standard Material	TPUST1					
move Tension Member	Steel					
Belt Color	White / Red					

AT15**move** Belt "M" Specifications

Construction	Tension-member	Dimension	Belt Width (mm)			
			50	75	100	150
Open-Ended "M"	AT15 move Tension Member	F _{zul} [N]	18,200	27,300	36,400	54,600
	Specific Stiffness	C _{spec} [N]	4.55 - 10 ⁶	6.82 - 10 ⁶	9.10 - 10 ⁶	13.65 - 10 ⁶
	Belt Mass	[kg/m/cm]	0.1004 kg per meter of belt length per cm of belt width			

move-series® Flexibility

(minimum tooth count/minimum diameter)

Drive w/o back bending	Tension Member Construction	AT15 move Tension Member M/BFX
	Z _{min}	20
	d _{min} (mm)	100
Drive with back bending	Tension Member Construction	AT15 move Tension Member M/BFX
	Z _{min}	25
	d _{min} (mm)	120

